

Mobile Robot Navigation in Dynamic Environment using Fuzzy Logic

Rayees Ahmad¹, Prof. Gagan Sharma²

¹MTech Scholar, ²Assistant Professor
Sri Satya Sai College of Engineering,
RKDF University, Bhopal, Madhya Pradesh, India
¹rayeesnaik4@gmail.com

Abstract: Robots soon will quickly be involved in the day-to-day lives of humans as research is now moving towards mobile robots that can help us in our daily lives. Navigation is one of the enabling techniques, and the main idea of this thesis is navigation. Navigating the process of accurately determining a robot's location, and planning and tracking. This concept introduces a Simulink model that contains various sensors for robotic navigation without colliding in a vertical position. Two controls, an unadulterated interest and a dark rationale regulator, are considered to oversee mechanical route by evading obstructions. Overlooking snags, the unadulterated interest regulator consolidates the vital and rakish ways to control the robot beginning to end point. In any case, if there are snags enroot, the robot will crash into hindrances enrooted. Accordingly, the robot won't arrive at a given objective zone. A dark psyche control is utilized to keep away from deterrents in the method of route. The boundless brain control takes the separation of the snag, the edge of the deterrent, the heading of bearing and the x-connection of the area of the objective territory as info. Accordingly, the nonsensical regulator delivers the necessary change in the rakish speed of the robot. This change in precise speed is applied to the rakish speed gave by the unadulterated following regulator. The test work was performed utilizing the Turtlebot Gazebo test system. Wandering including nature, snags and rising ways are likewise obvious

Keywords: Robotic navigation, Simulink model, Turtlebot, Unadulterated Interest, Dark Rationale Regulator

I. Introduction

Robotics is that branch of science and technology which include the design, application and fabrication of robots. Robotics being inter-disciplinary includes techniques from mechanical, electrical and computer science engineering. Through robotics the internet seems like, as if it has gained senses, hand and feet and thus mobile robots have given industry a new face and is still an open challenge. No doubt our society has accepted the use of robots to perform dangerous active-ties such as : exploration of nuclear power plants but now robots are moving out of the factory to perform numerous human activities and assistant us in our daily lives. Robots really work beyond our imagination and thus creating a new world of autonomous agents. The great beauty about robots is that they have ability to sense their environment with the help of sensors and can intelligently execute their tasks to pursue their goals. When we say robots, we actually mean the machines which make their own decisions through programming. For instance, if a human being decides to pick up a piece of metal from the ground, he would come across the following steps. First and foremost is visual thing as his eyes need to see the piece of metal where exactly that is lying on the ground. The next step is that of stimulus which is sent to the brain, the brain in turn responds back to the same information and henceforth decides to pick up the piece of metal and eventually his hand picks the piece of metal that is lying on the ground and same is true for robots. They undergo the same process that is given to them via commands. Navigation is one of the most important process of robotics. Navigation is the process of precisely determining one's location and, moreover, it is a desperate need and necessity for all mobile robots to plan and follow the path. Two main categories by which robotic navigation have been solved are deterministic algorithms and non-deterministic algorithms, and nowadays evolutionary algorithms which are hybridizing of both deterministic and non-deterministic Algorithms is being used to solve the problems. In robot navigation, path planning is one of the major task and therefore, attracted many re-searchers in the recent time. The scope to analyze in uncertain environment is important in people. Like, if we human need to cross a road, if there is no movement of

objects or things moving from the road we cross the road safely. But if there is movement of objects our focal point is on the objects coming toward us, then we stand by and mark the actual time to move to the other point. Then we choose whether to cross the road or not. In order to copy human, so the robot has potential to navigate in dynamic environment without colliding with the objects. For mobile robot to move in dynamic environment, where there are number of objects and human is challenging task due to the difficult structure of given environment. To overcome the situation of path planning, various algorithms based on deterministic, non-deterministic and neural network are developed.

They imitate human eyes, brain and hands as they have sensors instead of eyes, control system instead of brain and effectors instead of eyes. It is a herculean task to develop each of these components in robot, as sensors must detect sounds and images efficiently and correctly. Effectors also ought to be fast and flexible enough to do what we instruct them to do and control system must make all decisions effectively to make effectors and sensors coordinate each other to make work done properly and efficiently. Navigation is precisely calculating one's position and, moreover, it is a desperate need and necessity for all mobile robots to plan and follow the path. Two main categories by which robotic navigation have been solved are deterministic algorithms and non-deterministic algorithms, and nowadays evolutionary algorithms which are hybridizing of both deterministic and non-deterministic algorithms is being used to solve the problems.

2. Related Work

Navigation is a desperate need and necessity for all mobile robots. Two main categories by which robotic navigation have been solved are deterministic algorithms and non-deterministic algorithms, and nowadays evolutionary algorithms which are hybridizing of both deterministic and non-deterministic algorithms is being used to solve the problems. In this task and therefore, attracted many re-searchers in past in [2]. Worldwide way organizer and neighborhood way organizer are the two primary pieces of the route arrangement of independent robot. The route cycle can be sub separated into two sections worldwide route worldwide route strategy is utilized to discover internationally ideal way based on the earth. Anyway, without satisfactory convert data the worldwide route procedure isn't material accordingly neighborhood route strategy can likewise be applied when the route condition is obscure or cloister obscure. In robot route hindrance shirking is one of the significant assignments [3]. Hindrances in the path way can be arranged as static and dynamic. Static are that who don't coinage their location and direction. Dynamic changes their position or direction after the beginning of route measure, different prerequisites of snag evasion can be fulfilled for the changing separation among robot and the hindrances [4]. For versatile robots, great way arranging innovation of portable robot cannot just spare a great deal of time, yet in addition lessen capital venture of portable robot [5]. Right now, the way arranging issue is one of the most investigated subjects in self-governing advanced mechanics. That is the reason finding a protected way in troublesome condition is a significant necessity for the accomplishment of any mechanical undertaking [6]. In [6] notwithstanding this likewise find briefest way from start to objective position. For versatile robots, route in unique condition is a difficult undertaking on the grounds that the area of snags is obscure before beginning of the route cycle. Huge numbers of the analysts have added to impact free robot route, for dodging deterrents, following way arranging have been proposed in [7]. The authors have used range sensors as the sensing element for localization. The issue of way arranging in obscure climate doesn't have any data of its current circumstance however approaches past gathered from route measure [8]. To address the navigation process, the authors in [8] proposed a novel, machine learned based algorithm called semi markov decision process. Separation of different hindrances, in the route way of the robot, can be acquired by the separation run sensors of the robot. Utilizing these scopes of impediments, the robot can be kept from traps [4]. For collision free robot navigation in a static environment, the persistent-bug algorithm to prevent both global and local loop trapping is developed in Static obstacles of random shapes are regarded to test of the algorithm. Simulink model for robot route with hindrance evasion in an obscure climate is introduced in [3]. In [3] a calculation dependent on robot position, laser checking and span of outputs is executed to perceive the reoccurrence of obstructions during the route. Recently, various researchers are attracted to fuzzy controllers for obstacle avoidance in robot navigation. A behavior based fuzzy logic architecture for mobile robot navigation in unknown or

dynamic environment is presented in [9]. More over the authors in [9] have designed and implemented four basic behaviors for mobile robot navigation in complex environment which include tracking behavior, obstacle avoidance deadlock disarming behavior and goal seeking. Ideal arrangement by and large operational attributes of the organization would be characterized dependent on the potential and the idea of neurons interconnections. An epic organically spurred neural organization approach exists for crash free ongoing robot way arranging in a unique climate. This model can be helpful to vehicle like robots and multi robot frameworks. The state space of the neural organization is the arrangement of the robot, and the enthusiastically changing climate is spoken to by the dynamic movement scene of the neural organization. The objective was universally pulled in towards the robot, while hindrances drive the robot away to dodge crashes. In [10] a Neural organization way to deal with way arranging was produced for 2D robot. The robot moves from introductory to conclusive area if it's neighboring point, closer to objective area is empty. An exceptionally less exorbitant portable robot stage with four wheels can move as a line adherent robot in two-dimensional climate with snag evasion [11]. The robot successfully recovers from the collisions. the obstacle avoidance can be handling Anyway the fluffy surmising framework created in [12]. In [12] the fundamental detriment of the work is that the work doesn't prompt crash free route. Thus, the techniques dependent on sensors which lead to hindrance shirking without impact during route can be taken for future work. Mamdani-type fluffy obstruction framework, having contributions as robot pivot point, and separation between impediments to the robot is created. Anyway, the fluffy induction framework created in [13]. However, the fuzzy inference system developed in [13] is not applicable in dynamic environment but only to static environments. A Simulink model with the unadulterated interest and fluffy rationale regulators is created in [14]. In [13] the unadulterated interest regulator discovers an immediate way from start to next objective area and fluffy rationale regulator dodges the impediments in robot route. The proposed work in gazebo test system.

[15] Depends on unadulterated interest calculation, the probabilistic aides in robot way the guide of the robot's way is made as inhabitancy cross section. In this guide, the probabilistic aides are gained. An effective path from begin to end, robot course is gained from probabilistic aides. Test work is performed on turtlebot robot in gazebo test system. Matlab is utilized as programming language. The imprisonment of the work is that it is appropriate to the condition with static snags. For future work there is opportunity to build this work for the dynamic condition with dynamic or moving articles. In [16] the work is focused on to find the shortest distance from start to goal without any collision. Also, obstacles of various dimensions are considered. So, the main algorithm is partitioned into three sub frames.

a) Sub frame of path length: if no object is present in the given environment this sub frame calculates the diagonal length between source and goal point.

b) Sub frame of path authorization: if there is some object present in the path then path Length will not be same. Then obstacle avoidance function is to be used.

c) Sub frame for levelness: this sub frame is used to find the levelness of given environment and calculates the levelness curve angle twist points are recovered through Biezer curve method. In [17] robot navigation in uncertain environment is explained, where dynamic objects. The proposed paper is based on firefly algorithm. Fuzzy controllers explore minimum time instants. By using these controllers' dynamic objects gets recognized without any difficulty. This algorithm is powerful over all other algorithms. It reduces seeking time and robot easily navigates in the environment. Distance can be computed through Euclidian distance. In [18] the author proposed that laser scan executed for localization and mapping. Various computations have been showed to achieve the laser scanning. The foremost computation was proposed to collect and reserve the laser examined features obtained from the robot scan. The next computation is to perform matching and map building. By making use of good output matches, a neural network is developed.

2.1 Path planning: It is the necessary component in navigation of mobile robots. It is considered important researched topics in robotics. It is the action to plan a route in a particular surrounding by reducing the cost affiliated with the path. Path planning of mobile robot can be restricted based on the environment and type of algorithm used. It can be concluded in both static as well as dynamic environments. Path planning is mainly based on two divisions

1. Local path planning
2. Global path planning

Numerous approaches that are used for navigation of mobile robot are broadly categorized into two divisions that are classical approaches and heuristic methods.

2.2 Classical approaches:

In this approach either an answer would be found or it would be demonstrated that such an answer doesn't exist. The principle drawback of such strategies is their calculation escalation and powerlessness to adapt to unconventionality. Such disservices make them perfect in genuine world. Strategies, for example, cell disintegration, expected field, guide, are arranged as old-style techniques:

2.2.1. Cell decomposition: It is profoundly utilized in writing review in way arranging issues. In this, the thought is to diminish the inquiry space by utilizing portrayal dependent on cells. The key thought behind this methodology is it breaks down the free space into set of straightforward areas called cells. The target of this is to arrive at the objective point securely. the fundamental way arranging calculation dependent on cell disintegration are in [19].

Following steps for using Cell decomposition as motion planner for robot areas.

-break the space to connected regions called cells.

-build a chart nearby cells .in such a diagram vertex signify cells and edges interface having a typical limit.

- Give a path from the acquire cell sequence.

The limitations of the approach areas;

1. No passage way among narrowly spaced obstacles.

2. Oscillations in narrow passages.

3. Oscillations in the existence of obstacles.

2.2.2 Road map: It is otherwise called high way approach. It is an approach to get starting with one spot then onto the next and the association among the free spaces is spoken to by a lot of one-dimensional bends. Here hubs assume a key part in getting the ideal way for the robot. It is for the most part used to locate the briefest way from the robot's underlying situation to objective position. Visibility and Varoni chart are two mainstream techniques for creating guides. visibility diagram is the chart whose vertices comprise of the beginning, target and the vertices of polygonal hindrance of the inadequacy of visibility diagram is that the subsequent most brief ways contact obstructions at the vertices' or even at edges and afterward are undependable. Varoni charts are fit for tending to this disadvantage. In the varoni outline streets remain as distant as conceivable from snags subsequently it has the safe way and minimal longer visibility chart.

2.2.3 Potential field method: In this method repulsive and attractive forces are assigned for the obstacles. Attractive field is generated which moves inward to goal. In each time stamp a different potential field is generated across the free space.

The attractive force is given by

$$U_{att} = 0.5 * K_{att} \rho (goal)_2 \quad (1)$$

The repulsive force is given by

$$U_{rep} = 0.5 * K_{rep} * (1/\rho(q) - 1/\rho_0)_2 \quad (2)$$

Where K_{att} and K_{rep} are positive constant [6].

Resulting force is given by

$$U(q) = U_{att}(q) + U_{rep}(q) \quad (3) \backslash$$

Obstacles are avoided while moving towards target [6]. It is based on the method where map is predefined.

2.3 Heuristic approach: the main algorithms in heuristic approach are (GA), (ACO), (PSO) and probabilistic road-maps.

2.3.1 Genetic algorithm:

It is the worldwide pursuit and enhancement strategy. This figuring mirrors the pattern of typical assurance where the fittest individuals are picked for multiplication so as to deliver posterity of people to come. The technique was proposed in 1975 by professor j. Hull and from Michigan University. In each

algorithm [20], path improvement is applied. The smoothness function is calculated through path length and smoothness function. This shows exceptional results as compared to other algorithms [20]. The population is the sequence of strings known as chromosomes. First particular propagation is applied to the current populace with the goal that string makes various duplicates relative to their own wellness is a transitional populace. Second, GA select "guardians" from the ongoing populace with an inclination that better chromosomes are probably going to be chosen. Third, GA imitates kids (new strings) from chose guardians utilizing hybrid or change administrators. Hybrid is essentially comprising in an irregular trade of pieces between two strings of the transitional population. This algorithm rectifies the problem of premature convergence and the length of the path obtained is shorter and the convergence speed is near to genetic algorithm.

2.3.2 Ant Colony Optimization: (ACO) is actually based on universal searching method and population for the solution of complex combinatorial problems, which is motivated by behavior's which was developed by Marco Dori-go in the 1990's. This technique is acceptable where source and goal are predefined. This style is based on multi goal path planning problems in the presence of obstacles. This technique is based on following algorithm:

- 1) Create ants.
- 2) Iterate every ant then entire work is finished
- 3) Place pheromone to the visited locations.
- 4) Daemon actions.
- 5) Vanishing pheromone.

These techniques are used for path planning [20], [21] and obstacle avoidance.

2.3.3 Particle swarm optimization: it was given by Kennedy and Eberhar [22] which was roused by the rummaging conduct of winged creatures. It is nature-based Meta heuristic calculations which receives the social conduct of animals, for example, fish schools and flying creature runs. The calculation mimics the scavenging conduct of flying fowls and accomplishing their objectives. Through a joint collaboration between winged creatures. Every molecule of multitude enhancement looks in a gathering directed by particles which was instated haphazardly. The Particles move its stance and speed as indicated by the insights of the gathering. Particles update its speed and position as indicated by the recipe introduced in [23]. The algorithm is studied in [21] and this algorithm solves the problem of incomplete convergence.

2.3.4 Neural networks: Neural networks (NN) is the investigation of understanding the interior usefulness of the cerebrum. It has been by and large reused in looking through enhancement, learning, furthermore, design acknowledgment issues because of its capacity to give basic and ideal arrangement. Generally operational attributes of the organization would be characterized dependent on the potential and the idea of neurons interconnections. An epic organically roused neural organization access exists for impact free continuous robot way arranging in a unique situation.

This model can be valuable to vehicle like robots and multi robot frameworks. The state space of the neural organization is the arrangement of the robot, and the vivaciously changing condition is spoken to by the dynamic action scene of the neural organization. The objective was internationally pulled in towards the robot, while hindrances drive the robot away to dodge crashes. In [23] a NN way to deal with way arranging was produced for 2D robot to avoid collisions. In [10] an NN approach to path planning was developed for 2D robot.

3. Proposed Experimental Setup

Proposed Simulink Model

Fig. 4.1 shows the proposed Simulink model. In the model, there are two sub-scribers for tolerating sensor data from the robot. The first gets messages shipped off the subject of "/channel". In order to remove inspect ranges and edges, the "/channel" message is then taken care of. The second endorser in the model gets messages shipped off the subject "/Odom". Robot's odometer data sent on the "/Odom" subject. The robot's (x, y) territory is then isolated from the messages of "/Odom". The course of action of waypoints is the way which the robot follows. Two-dimensional orchestrate positions for the robot way are taken as waypoints. Three centers are considered as waypoints. Out of these three waypoints, the

first is the starting circumstance of the robot. The second reason for the waypoints lies inside or close to the preventions, so that, it might be attempted if the robot will evade a hindrance. The third waypoint is the goal position. Unadulterated intrigue and cushioned controllers are used in the proposed model to move the robot from start to target territory. The unadulterated interest regulator takes two data sources: the robot's (x, y) area and set of determined waypoints. The unadulterated interest regulator registers straight and precise speeds to move the robot from current to next objective area without thinking about deterrents in the way. An extra regulator is subsequently needed to dodge deterrents. The proposed fluffy rationale regulator, which is another regulator in the model, is utilized to stay away from snags in the route way. The fuzzy controller takes four in-puts, two of which, 'Separation' and 'Point' are gotten from MATLAB work.

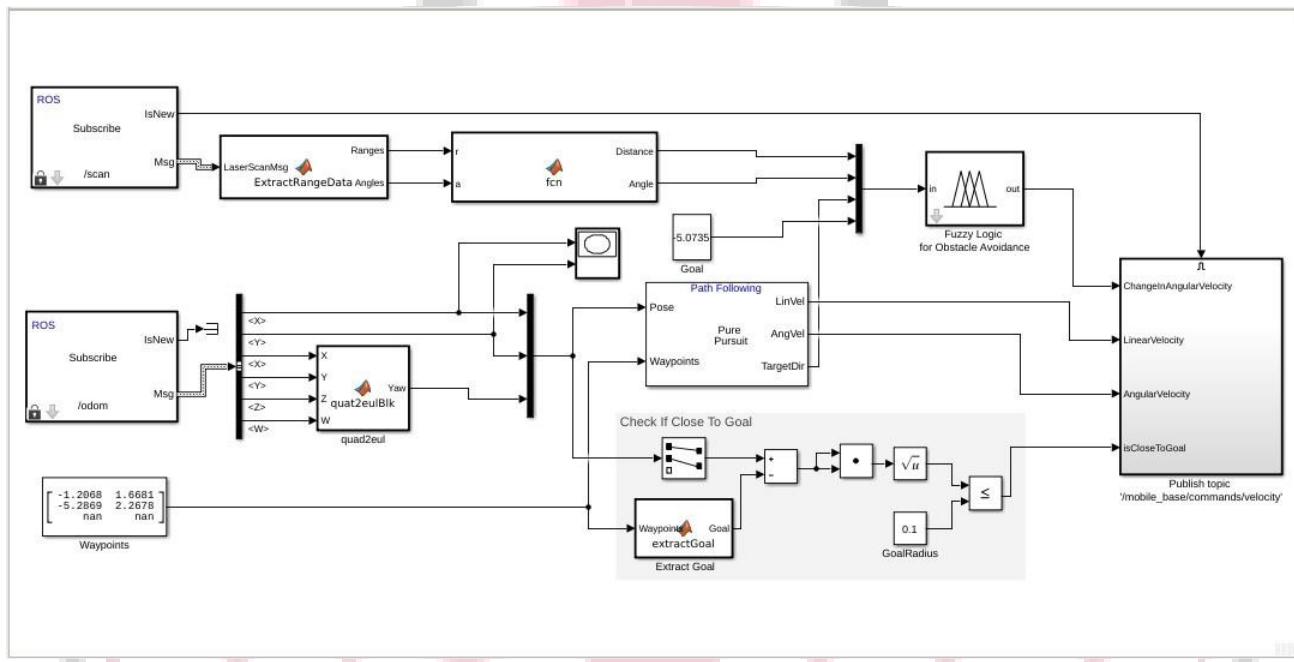


Figure 4.1: Simulink Model

3.1.1 Membership Functions

The membership function for input 'Distance' of fuzzy logic controller is splitted into two categories as 'Close' and 'Far'. The 'Close' category puts forth that the obstacle is near to the robot. On the other hand, 'Far' category puts forth that the obstacle is far from the robot. In the former situation, to avoid the obstacle, robot needs to change its angular velocity. While in the later situation no change in angular velocity is required. The membership function for 'Distance' is shown in Fig. 4.3. The membership function for another input variable 'Angle' of fuzzy logic controller is splitted into three categories as 'left Side', 'center' and 'right Side'. These categories acknowledge whether the obstacle is at left, center or right to the robot. The membership function for 'Angle' is shown in Fig. 4.4. There is only one output variable ' ΔW ' that is also divided into three categories as 'left Turn', 'no Turn' and 'right Turn'. The enrollment work for ' ΔW ' is appeared in Fig. 4.5. Moreover, for the rest two information factors, 'Target Direction' and 'Objective', the participation capacities are characterized as follows: The support work for the data variable 'Objective' is similarly detached into two groupings 'Positive' and 'Negative'. Positive show that target zone is on the right side and negative exhibits that target territory is on the left side. The enlistment work for 'Objective' is showed up in Fig. 4.7. Along these lines, when robot moves and the goal is towards left then the robot is guided towards the left to keep up a vital good way from the hindrance in the manner. Along these lines, if the robot is going towards left and goal is towards right, by then the robot is composed towards the ideal for the obstruction evading.

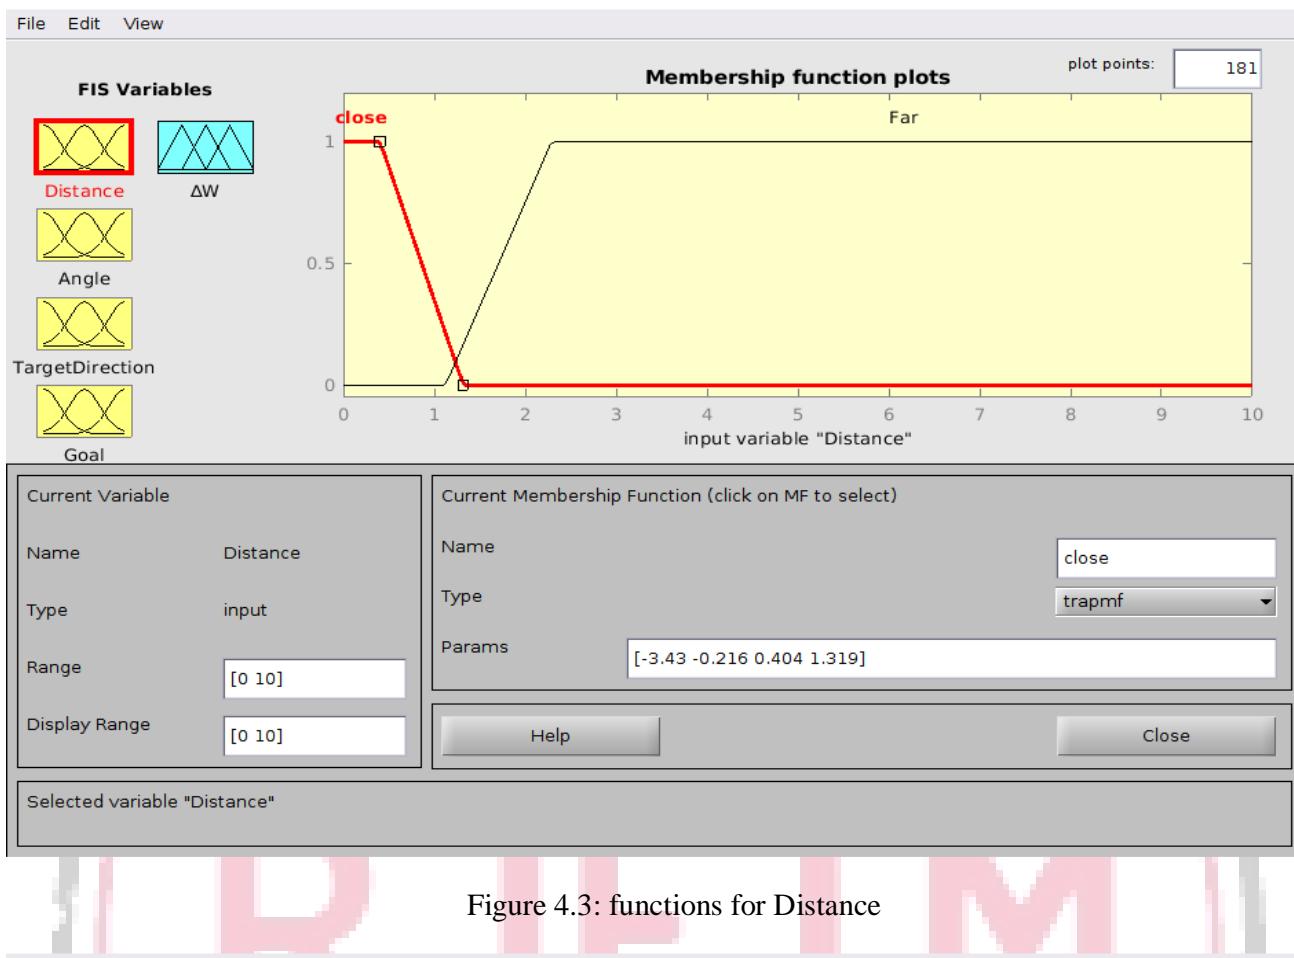


Figure 4.3: functions for Distance

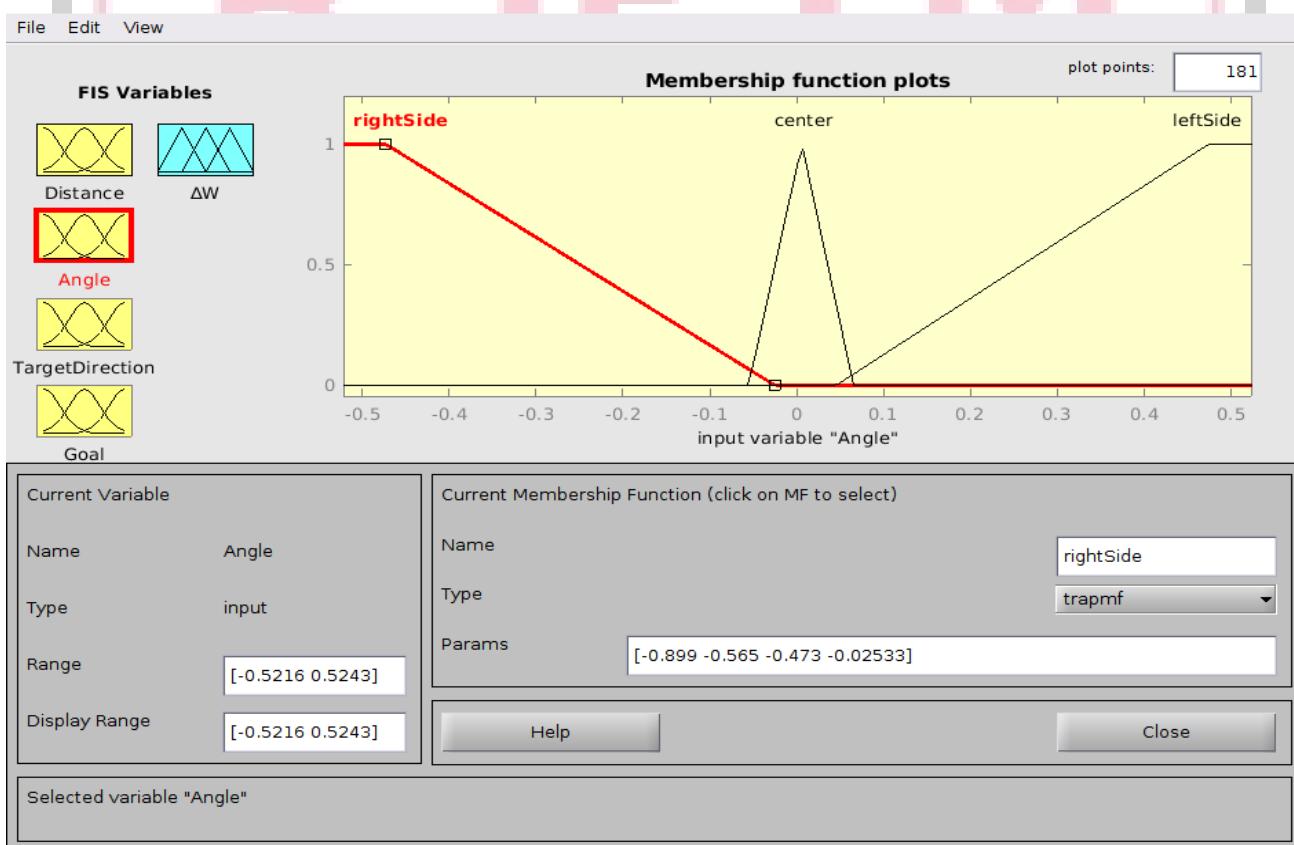


Figure 4.4: functions for Angle

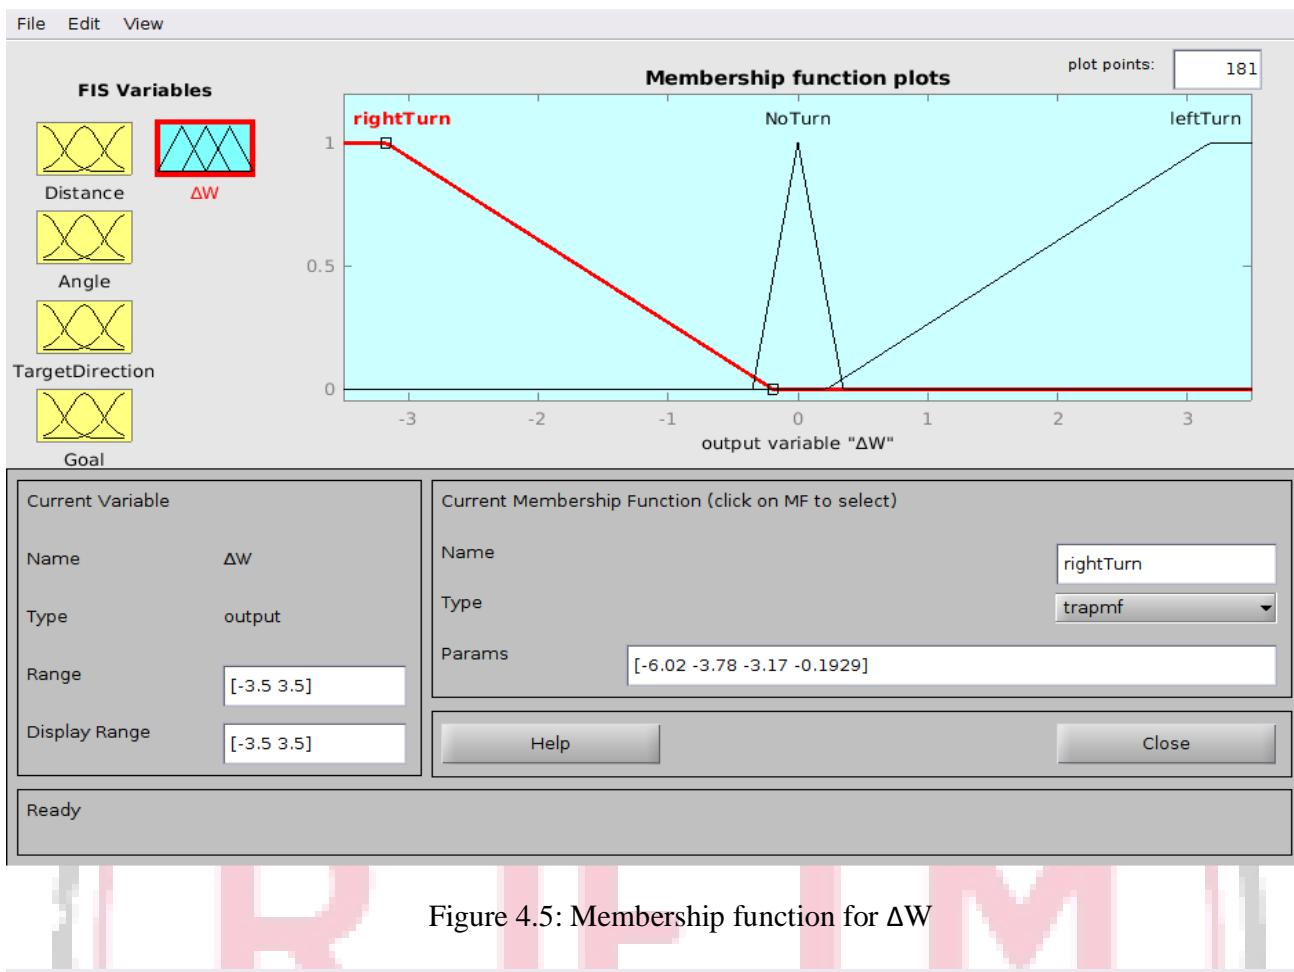


Figure 4.5: Membership function for ΔW

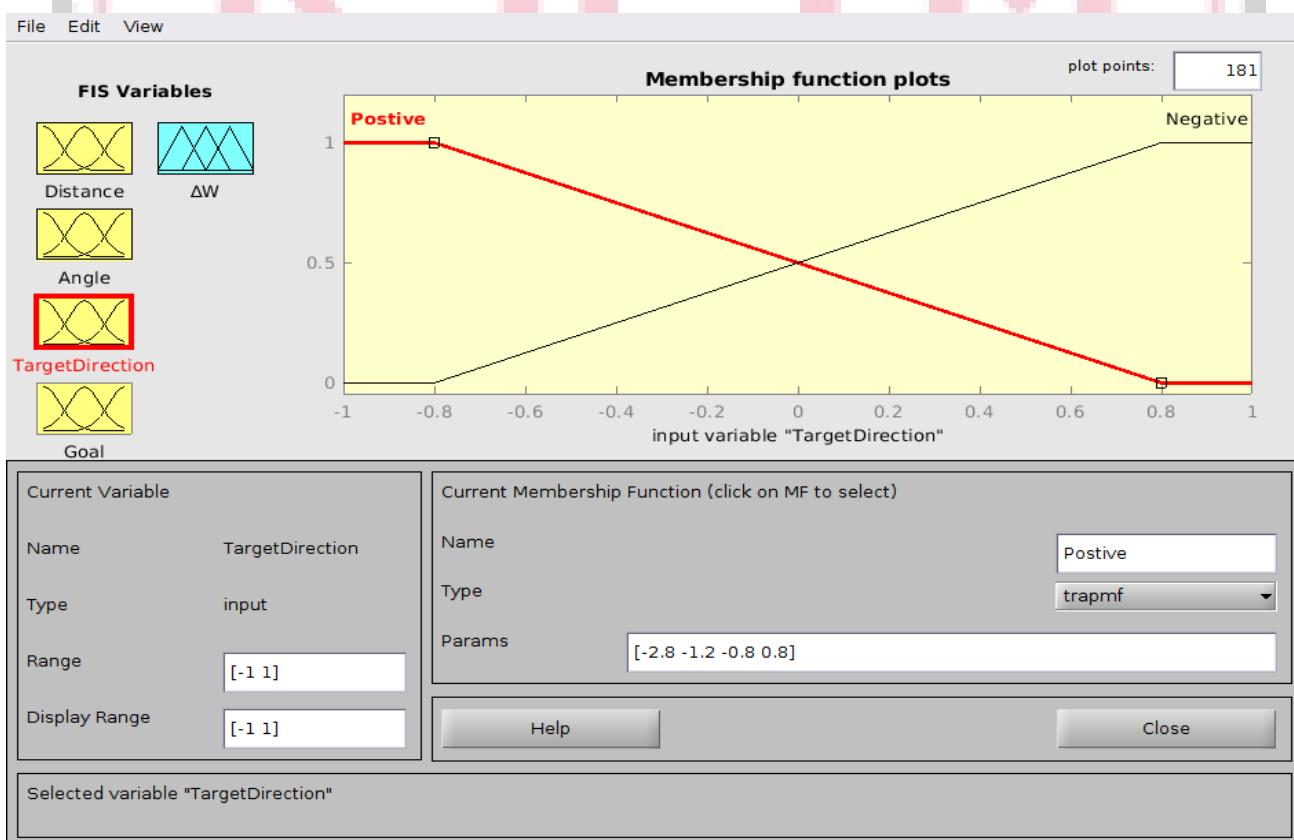


Figure 4.6: Membership function for Target Direction [14]

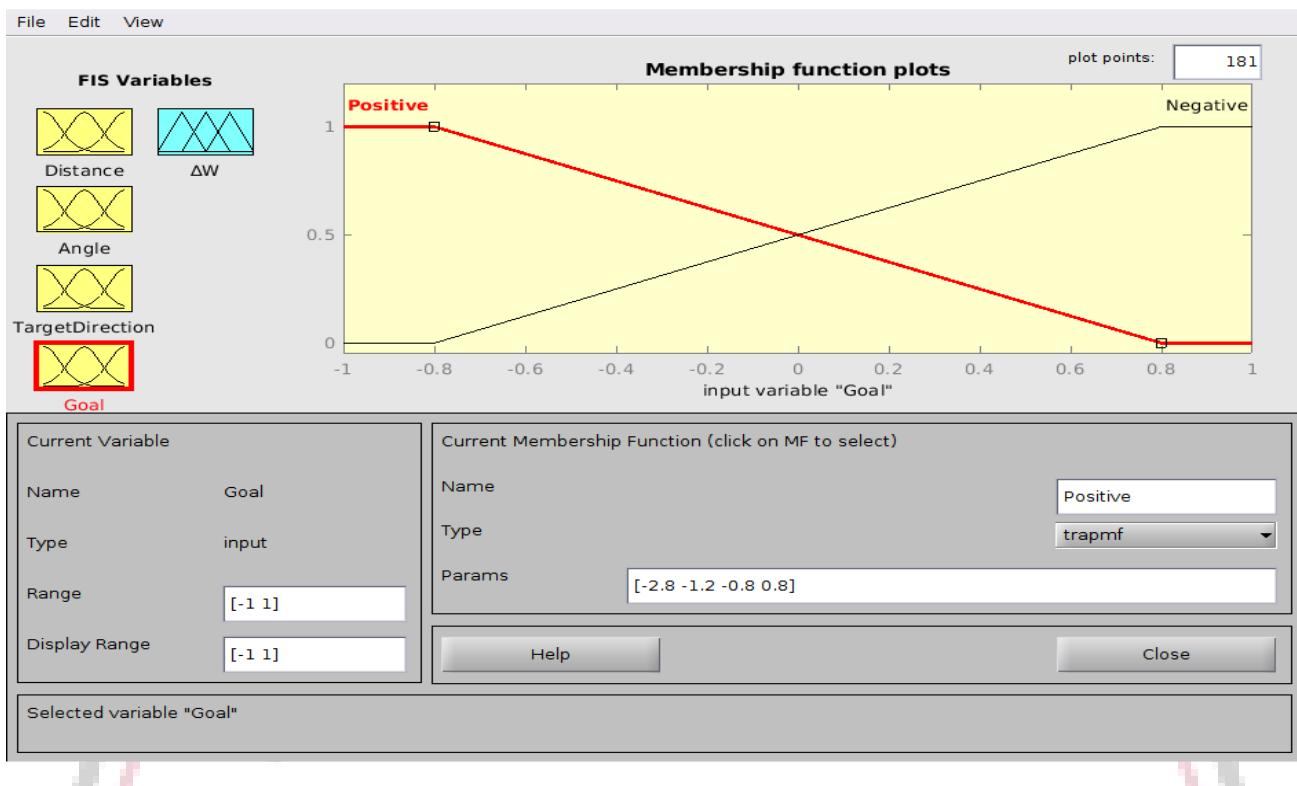


Figure 4.7: Membership function to go [14]



Figure 4.9: Rule Viewer [14]

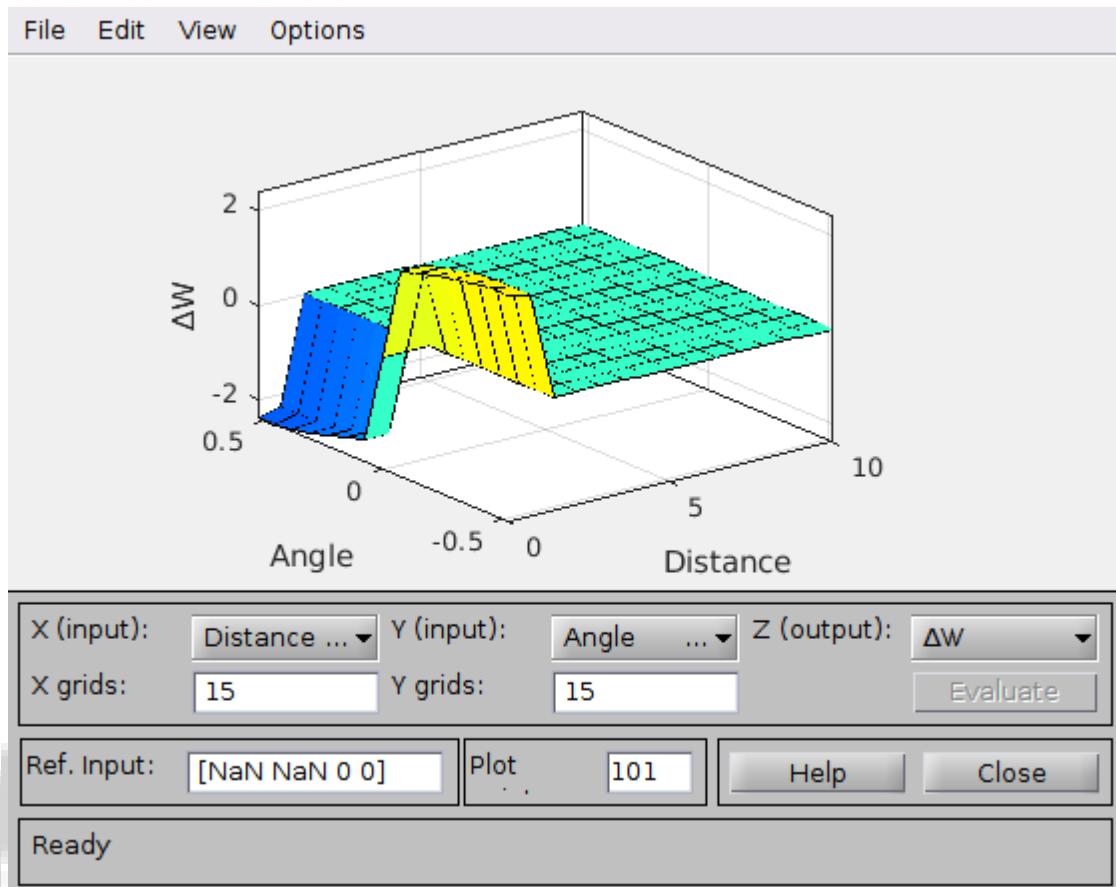


Figure 4.10: Surface View

4. Experimental Setup

The trial effort is carried on a PC having double center 2.4 GHz + Intel i5 PC and 4 GB of Slam. This working framework utilized is Ubuntu 16.04 LTS. The adaptation of the Robot Working Framework robot operating system is Active (1.12.2). Turtlebot-Gazebo test system 7.0.0 is considered for the execution. Tangle LAB R2018a is utilized as a programming reason.

Installation phase

For simulator we need to have Linux operating system either as core operating system as well as virtual machine then we need to install robot operating system. After that we need to install simulator which is the environment for development of robots. Finally, we need to install turtle boot.

Installation of ROS


Ubuntu 16.04 LTS supports ROS Kinetic only. As we have used Ubuntu 16.04 LTS, so we installed ROS Kinetic. The commands to install ROS Kinetic are shown in Fig. 5.1.

Installation of Simulator

We used Gazebo simulator for simulation. ROS Kinetic supports Gazebo 7 only. The commands to install Gazebo are shown in Fig. 5.2.


Installation of Turtlebot

The commands to install Turtlebot are shown in Fig. 5.3.

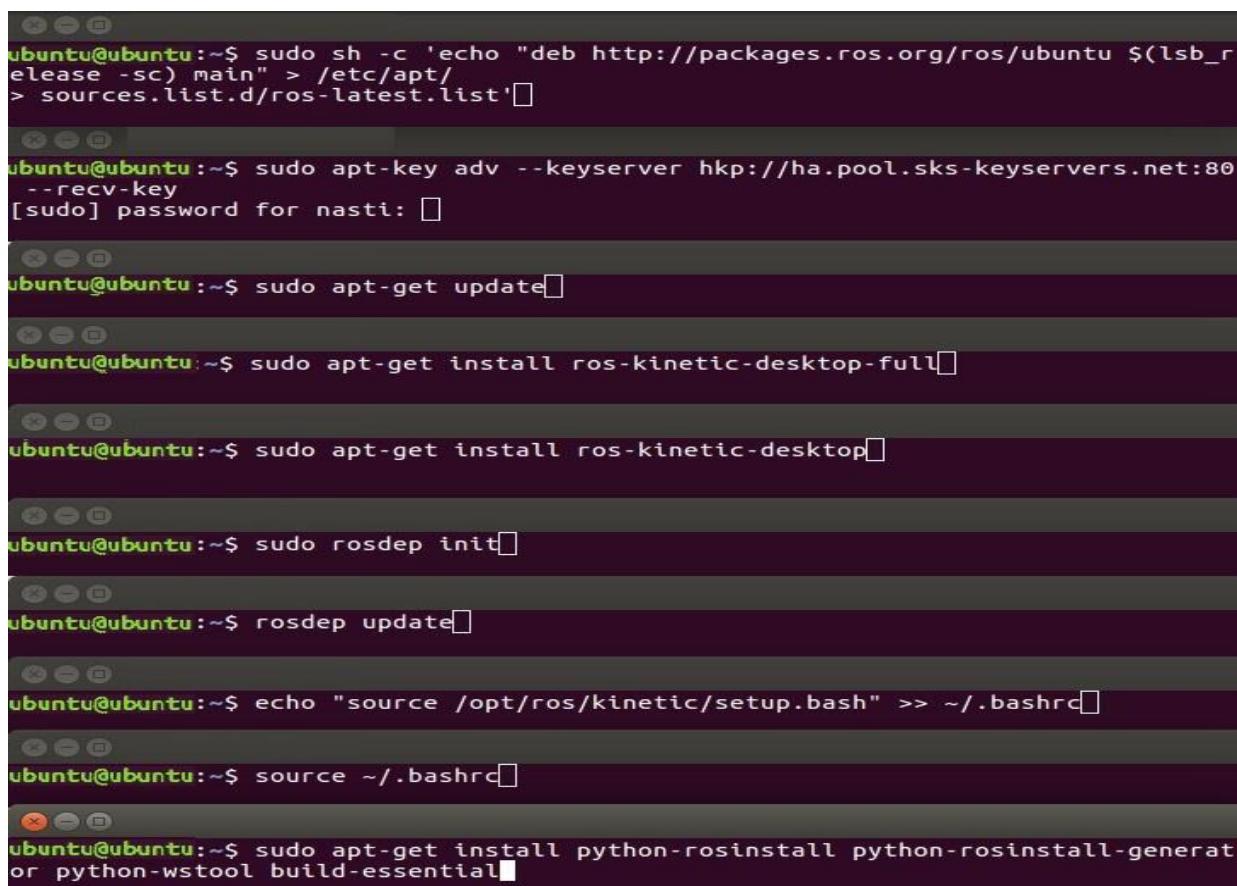

```
ubuntu@ubuntu:~$ sudo sh -c 'echo "deb http://packages.ros.org/ros/ubuntu $(lsb_release -sc) main" > /etc/apt/sources.list.d/ros-latest.list'
ubuntu@ubuntu:~$ sudo apt-key adv --keyserver hkp://ha.pool.sks-keyservers.net:80 --recv-key [sudo] password for nasti:
ubuntu@ubuntu:~$ sudo apt-get update
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-desktop-full
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-desktop
ubuntu@ubuntu:~$ sudo rosdep init
ubuntu@ubuntu:~$ rosdep update
ubuntu@ubuntu:~$ echo "source /opt/ros/kinetic/setup.bash" >> ~/.bashrc
ubuntu@ubuntu:~$ source ~/.bashrc
ubuntu@ubuntu:~$ sudo apt-get install python-rosinstall python-rosinstall-generator python-wstool build-essential
```

Figure 5.1: Commands to install ROS

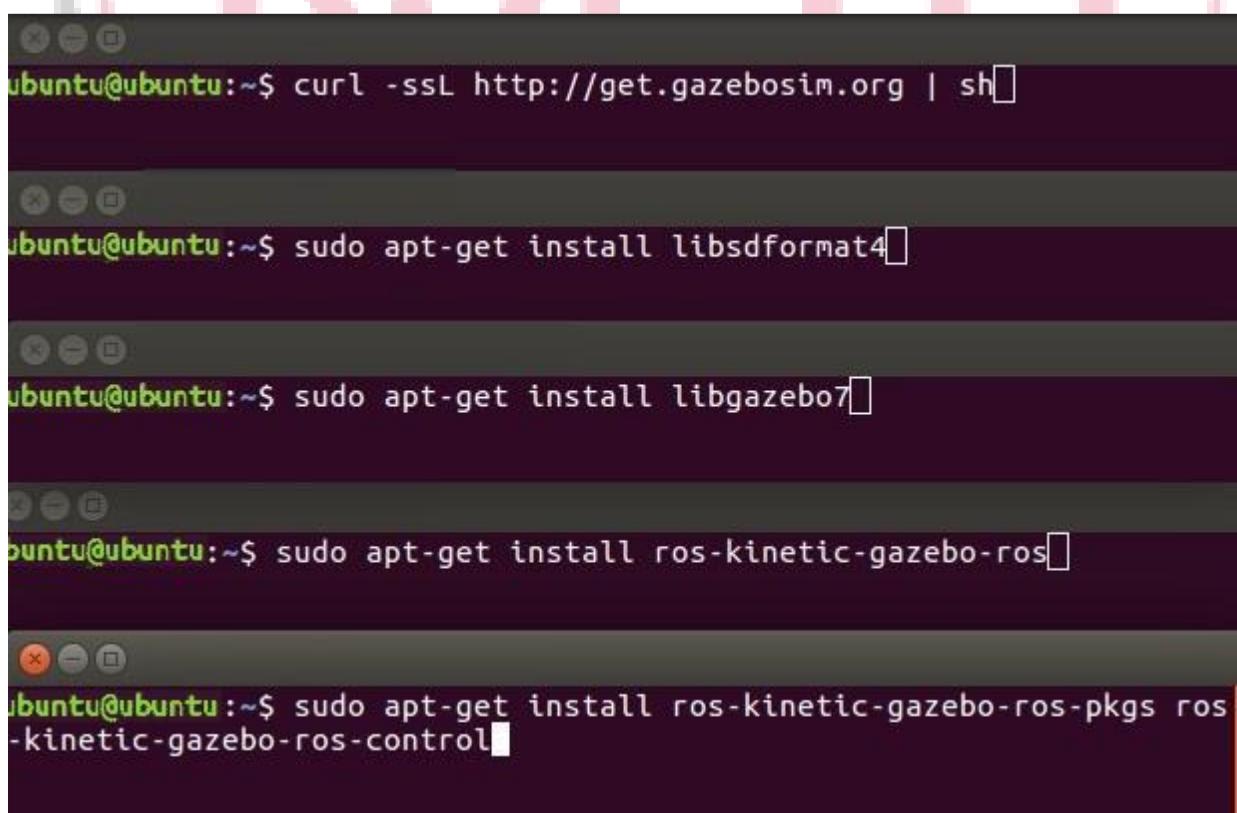

```
ubuntu@ubuntu:~$ curl -ssL http://get.gazebosim.org | sh
ubuntu@ubuntu:~$ sudo apt-get install libsdformat4
ubuntu@ubuntu:~$ sudo apt-get install libgazebo7
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-gazebo-ros
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-gazebo-ros-pkgs ros-kinetic-gazebo-ros-control
```

Figure 5.2: Commands to install Gazebo

```
ubuntu@ubuntu ~$ sudo apt-get install ros-kinetic-turtlebot
ubuntu@ubuntu ~$ sudo apt-get install ros-kinetic-turtlebot-apps
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-turtlebot-interactions
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-turtlebot-simulator
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-kobuki-ftdi
ubuntu@ubuntu:~$ sudo apt-get install ros-kinetic-ar-track-alvar-msgs
```

Figure 5.3: Commands to install TurtleBot

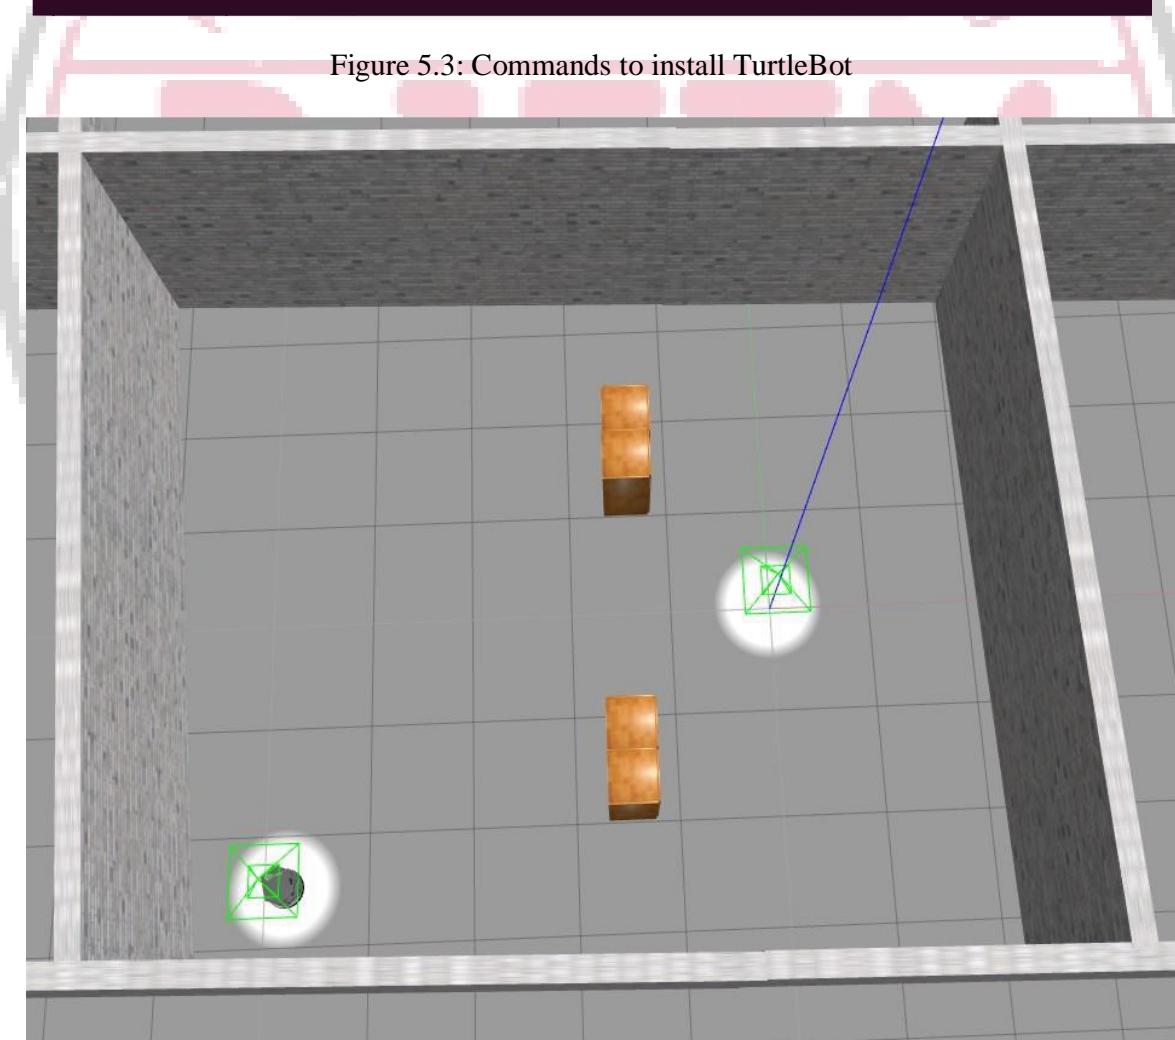


Figure 5.4: Navigation environment taken in Turtlebot-Gazebo Simulation

Conclusion

Robot navigation deals with the ability of the robot to direct itself from the starting location to the desired goal location to avoid collisions. In this paper, we have proposed Mobile Robot Navigation in Dynamic Environment using Fuzzy Logic. Our model is equipped for impedance shirking paying little mind to the overall places of the deterrents concerning the robot. The route, during the nearest hindrance is available at the left side in the robot's view zone then the provided model orders the robot to turn directly for the obstruction evasion. Additionally, for the snag at the correct side in the robot's view region, the left turn order is figured and sent to the robot. Significantly, when the obstruction is at the middle beam of the robot see territory then the model beats the trouble of left/right one-sided turning. In this circumstance, the fluffy rationale regulator of the model uses future data to alter the course of the robot as indicated by the objective area. Besides, before beginning route from start to objective area, no data with respect to the obstructions is required by the proposed model. The proposed model is, thusly, reasonable for route in a dynamic and obscure condition where deterrents are not known already or the impedance positions change after some interval.

References

1. S. M. Nasti, Z. Vámossy, and N. Kumar, "Obstacle avoidance during robot navigation in dynamic environment using fuzzy controller," *Int. J. Recent Technol. Eng.*, vol. 8, no. 2, pp. 817–822, 2019, doi: 10.35940/ijrte.A1428.078219.
2. A. Hidalgo-Paniagua, M. A. Vega-Rodríguez, and J. Ferruz, "Applying the MOVNS (multi-objective variable neighborhood search) algorithm to solve the path planning problem in mobile robotics," *Expert Syst. Appl.*, vol. 58, pp. 20–35, 2016, doi: 10.1016/j.eswa.2016.03.035.
3. N. Kumar and Z. Vámossy, "Obstacle recognition and avoidance during robot navigation in unknown environment," *Int. J. Eng. Technol.*, vol. 7, no. 3, pp. 1400–1404, 2018, doi: 10.14419/ijet.v7i3.13926.
4. H. Mousazadeh *et al.*, "Developing a navigation, guidance and obstacle avoidance algorithm for an Unmanned Surface Vehicle (USV) by algorithms fusion," *Ocean Eng.*, vol. 159, no. April, pp. 56–65, 2018, doi: 10.1016/j.oceaneng.2018.04.018.
5. H. Y. Zhang, W. M. Lin, and A. X. Chen, "Path planning for the mobile robot: A review," *Symmetry (Basel)*, vol. 10, no. 10, 2018, doi: 10.3390/sym10100450.
6. I. Hassani, I. Maalej, and C. Rekik, "Robot Path Planning with Avoiding Obstacles in Known Environment Using Free Segments and Turning Points Algorithm," *Math. Probl. Eng.*, vol. 2018, 2018, doi: 10.1155/2018/2163278.
7. S. Khan and M. K. Ahmmmed, "Where am I? Autonomous navigation system of a mobile robot in an unknown environment," *2016 5th Int. Conf. Informatics, Electron. Vision, ICIEV 2016*, pp. 56–61, 2016, doi: 10.1109/ICIEV.2016.7760188.
8. O. Saha and P. Dasgupta, "Real-time robot path planning around complex obstacle patterns through learning and transferring options," *2017 IEEE Int. Conf. Auton. Robot Syst. Compet. ICARSC 2017*, no. April, pp. 278–283, 2017, doi: 10.1109/ICARSC.2017.7964088.
9. Q. Y. Bao, S. M. Li, W. Y. Shang, and M. J. An, "A fuzzy behavior-based architecture for mobile robot navigation in unknown environments," *2009 Int. Conf. Artif. Intell. Comput. Intell. AICI 2009*, vol. 2, pp. 257–261, 2009, doi: 10.1109/AICI.2009.125.
10. C. Kozakiewicz and M. Ejiri, "Neural network approach to path planning for two-dimensional robot motion," no. 91, pp. 818–823, 2002, doi: 10.1109/iros.1991.174585.
11. S. E. Oltean, "Mobile Robot Platform with Arduino Uno and Raspberry Pi for Autonomous Navigation," *Procedia Manuf.*, vol. 32, pp. 572–577, 2019, doi: 10.1016/j.promfg.2019.02.254.
12. N. Kumar, Z. Vamossy, and Z. M. Szabo-Resch, "Robot obstacle avoidance using bumper event," *SACI 2016 - 11th IEEE Int. Symp. Appl. Comput. Intell. Informatics, Proc.*, pp. 485–490, 2016, doi: 10.1109/SACI.2016.7507426.
13. N. H. Singh and K. Thongam, "Mobile Robot Navigation Using Fuzzy Logic in Static Environments," *Procedia Comput. Sci.*, vol. 125, pp. 11–17, 2018, doi: 10.1016/j.procs.2017.12.004.

14. N. Kumar and Z. Vámossy, "Robot navigation with obstacle avoidance in unknown environment," *Int. J. Eng. Technol.*, vol. 7, no. 4, pp. 2410–2417, 2018, doi: 10.14419/ijet.v7i4.14767.
15. N. Kumar, Z. Vamossy, and Z. M. Szabo-Resch, "Robot path pursuit using probabilistic roadmap," *CINTI 2016 - 17th IEEE Int. Symp. Comput. Intell. Informatics Proc.*, pp. 139–144, 2017, doi: 10.1109/CINTI.2016.7846393.
16. N. Gupta and O. Nesaraj, "Robot Navigation in Dynamic Environment," no. May 2017, pp. 0–4, 2016.
17. B. K. Patle, A. Pandey, A. Jagadeesh, and D. R. Parhi, "Path planning in uncertain environment by using firefly algorithm," *Def. Technol.*, vol. 14, no. 6, pp. 691–701, 2018, doi: 10.1016/j.dt.2018.06.004.
18. N. Kumar and Z. Vamossy, "Laser Scan Matching in Robot Navigation," in *2018 IEEE 12th International Symposium on Applied Computational Intelligence and Informatics (SACI)*, 2018, pp. 241–246, doi: 10.1109/SACI.2018.8440969.
19. M. N. Zafar and J. C. Mohanta, "Methodology for Path Planning and Optimization of Mobile Robots: A Review," *Procedia Comput. Sci.*, vol. 133, pp. 141–152, 2018, doi: 10.1016/j.procs.2018.07.018.
20. Z. Zhu, F. Wang, S. He, and Y. Sun, "Global path planning of mobile robots using a memetic algorithm," *Int. J. Syst. Sci.*, vol. 46, no. 11, pp. 1982–1993, 2015, doi: 10.1080/00207721.2013.843735.
21. K. Bartęcki, D. Król, and J. Skowroński, "Wyznaczanie kluczowych wskaźników wydajności procesu produkcyjnego - część I: badania teoretyczne," *Pomiary, Autom. Robot.*, vol. 22, no. 3, pp. 5–13, 2018, doi: 10.14313/PAR.
22. R. Eberhart and J. Kennedy, "New optimizer using particle swarm theory," *Proc. Int. Symp. Micro Mach. Hum. Sci.*, pp. 39–43, 1995, doi: 10.1109/mhs.1995.494215.
23. Y. Wang, F. Cai, and Y. Wang, "Application of particle swarm optimization in path planning of mobile robot," *AIP Conf. Proc.*, vol. 1864, 2017, doi: 10.1063/1.4992840.